

Simply Clear.



CYPHO-150

Product Overview -

The AMEC CYPHO-150X (any CYPHO-150 model) is an AIS receiver. It receives AIS navigation data from AIS-equipped vessels nearby and the data is utilized to improve navigation safety. CYPHO-150X is designed to inter-operate with AIS Class A or Class B transponders, or any other AIS station operating on the AIS VHF data link.

CYPHO-150X is built with two parallel AIS receivers in one box. The default frequencies are standard marine VHF AIS channels, i.e. 161.975 and 162.025 MHz. Having CYPHO-150X AIS receiver on board, not only can you monitor the status of the vessels in the surrounding area, but also receive the dynamic information (position, speed, SOG, etc.), static information (ship name, MMSI, call sign, etc.), and voyage related information (cargo type, destination, etc.) from any vessels nearby that are equipped with AIS transponders.


Equipped with standard USB and NMEA0183, CYPHO-150X allows connectivities to most available peripherals in the market. Through USB, users are able to view AIS information on their preferred navigation chart software on their PCs or notebooks.

CYPHO-150X is IPX2 water resistant providing acceptable protection against water. It complies with international IEC 60945 standard and has gained CE/FCC conformity. You have made a smart choice to ensure a happy and safety journey.

KEY FEATURES

- ▶ Automatic Identification System - receive only
- ▶ Designed with sophisticated dual-channel receivers
- ▶ Able to receive all AIS information from Class A, Class B, Base Station AIS AtoN, AIS SART, etc.
- ▶ Field-proved exceptional receiving sensitivity performance
- ▶ Capable connecting PC or a range of display systems
- ▶ Compact size, robust housing, easy installation
- ▶ Support NMEA0183, USB, and NMEA2000 (optional) connectivities
- ▶ Optional WiFi connection and/or built-in VHF antenna splitter
- ▶ Package comes with friendly AMEC AIS Viewer software for PC

MECHANICAL

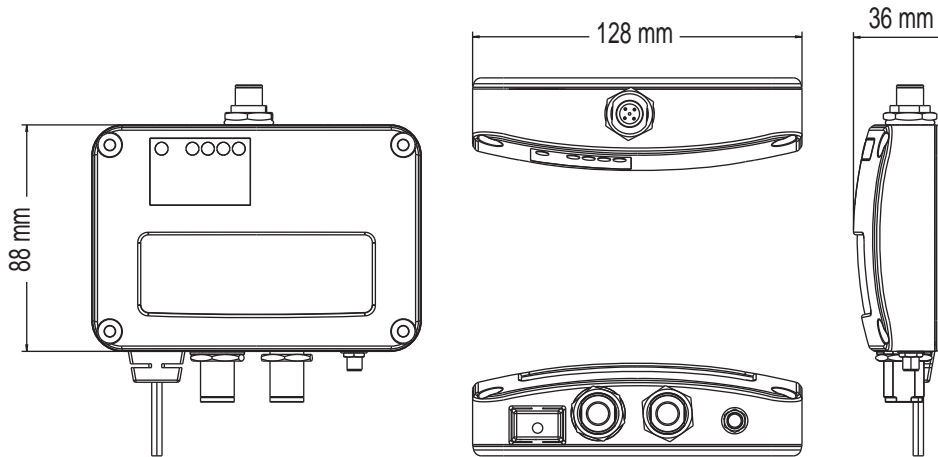

SPECIFICATIONS

▶ APPLICABLE STANDARDS

IEC 62287-1 (applicable parts)
 ITU-R M.1371 (applicable parts)
 IEC 60945 (applicable parts)
 IEC 61162 (applicable parts)

▶ AIS RECEIVER

Number of AIS Receivers	2 channels
Frequency Range	156.025 ~ 162.025 MHz
CH-1	Default CH 87B (161.975MHz)
CH-2	Default CH 88B (162.025MHz)
Channel Bandwidth	25KHz
Message Format	AIS Class A & B messages
Data Rate	9,600bps / per channel
Receive Sensitivity	-112 dBm @ PER ≤ 20%

▶ POWER SUPPLY

Supply Voltage	12 / 24V DC
Power Consumption	<1.50 Watt

▶ LED INDICATION

CYPHO-150	Power, Error, AIS Rx
CYPHO-150S	Power, Error, AIS Rx, Radio Tx
CYPHO-150WS	Power, Error, AIS Rx, Radio Tx, Wi-Fi

▶ RF PERFORMANCE (CYPHO-150S & 150WS only)

VHF Port Insertion Loss	Receiver Path	3.5dB
	Transmit Path	1.2dB

▶ EXTERNAL CONNECTORS

VHF Antenna Connector	Female Type M (PL 259)
NMEA 0183	38400 (default), 9600, 4800 bps
USB 2.0	Supported
VHF Radio	Supported (CYPHO-150S & 150WS only)
NMEA 2000	Supported (CYPHO-150WS only)
Wi-Fi	Dipole antenna (CYPHO-150WS only)

▶ WiFi CONNECTION (CYPHO-150WS only)

IEEE 802.11b/g/n

▶ ENVIRONMENTAL

Operating Temperature	-15°C~55°C
Storage Temperature	-25°C~70°C
Humidity Operation	0~95% RH at 40°C
Vibration	IEC 60945
Waterproof	IPX2

▶ PHYSICAL DIMENSIONS

Length	128 mm (4.99 in)
Width	36 mm (1.40 in)
Depth	88 mm (3.43 in)
Weight	210 g (including cable)

Note: Specifications are subject to change without prior notice.



Alltek Marine Electronics Corporation

7F, No. 605, Ruei Guang Rd., Neihu, Taipei, Taiwan. 114

Tel: +886-2-2627-1599 Fax: +886-2-2627-1600

www.alltekmarine.com

The AIS Specialists

Sales Contact

For more information, please contact your local representative or Alltek Marine at

sales@alltekmarine.com

Distributor/Dealer